



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CALIF. 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

www.yoshimura-rd.com

CHASSIS PROTECTOR SET


SUZUKI
2007-2008
GSX-R1000

040BG111700 CHASSIS PROTECTOR SET BLACK



Left Side

Right Side

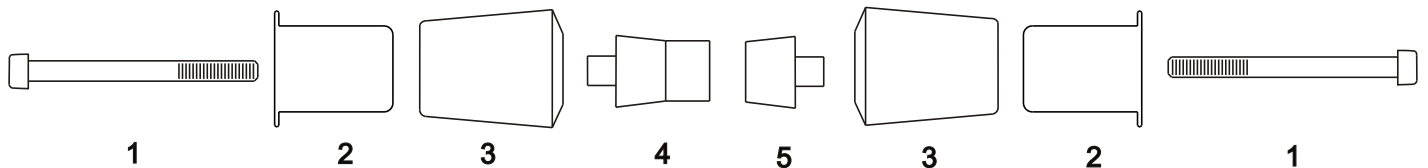

Parts Diagram

Part List:

NO.	DESCRIPTION	QTY	PART #
1	10mm x 90mm Socket Head Cap Screw	2	M10X1.25X90
2	Aluminum Insert for 1115-A03-01	2	1115-A03-01-IK
3	Chassis Protector (Black)	2	1115-A03-01
4	Aluminum Spacer (Left Side)	1	1116-A02-00
5	Aluminum Spacer (Right Side)	1	1117-A02-00
**	Yoshimura Sticker	2	17020C

Note: Read through all instructions before beginning installation.

Tools Needed:

Metric Socket Set
Ratchet and Extension
Metric Allen Socket Set
Torque Wrench

Installation Steps:

1. Remove the left side stock engine mount bolt and install chassis protector with long aluminum spacer onto the left side of the motorcycle using the supplied bolt. (See Parts Diagram for orientation).

Note: The longer aluminum spacer belongs on the left side of the motorcycle.

2. Torque supplied bolt to 5.5 kg-m (39 lb-ft).

3. Remove the right side stock engine mount bolt and install chassis protector with short aluminum spacer onto the right side of the motorcycle using the supplied bolt and washer (See Parts Diagram for orientation).

Note: The shorter aluminum spacer belongs on the right side of the motorcycle.

4. Torque supplied bolt to 5.5 kg-m (39 lb-ft).

IMPORTANT NOTE: Install Yoshimura Chassis Protector one side at a time. Removing both engine mount bolts simultaneously may cause engine to sag or drop causing the mounting holes to be misaligned.



Fig. 1



Fig. 2